REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	2	BASE/DOOR PULL/LATCHING POSITION	7/17/15	KB
	3	BASE/ LH DOOR PULL/LATCHING POSITION/METAL DOORS	9/17/15	KB
	3A	OAH CORRECTION FROM 76 OAH TO 72 OAH	1/14/16	KB

The only doors with locker hasps are at locker (non-corridor) rooms.
All non-corridor lockers are white metal doors and frames.
KPMB

18 GA SOLID TOP HAS A DOUBLE RETURN BEND ON THE FRONT SIDE AND A SINGLE RETURN BEND ON THE REAR.

3/4" INCH THICK WOOD DOOR WITH CUSTOMER DESIRED FINISH.

11 GA CRS SINGLE POINT HASP FOR PADLOCK.

ETCHED BLACK ANNODIZED ALUMINUM NUMBER PLATE CALL OUT LOCKER IDENTIY

12 INCH ZEE OFFSET

16GA CRS DOOR FACES

(HEIGHT) 69"

12"

3

18 GA RIGHT PANEL WITH TWO RETURN BENDS ON THE FACE AND SINGLE RETURN BEND ON THE OTHER SIDE.

(UNIT WIDTH)
1 COLUMN=15"
3 COLUMN=45"
4 COLUMN=60"

THE BUILT-TO-WIDTH PER UNIT IS:
ADD AN ADDITIONAL 1/8" PER UNIT FOR SPACE PLANNING PURPOSES. (3-15" COLUMN UNIT SHOWN)

(DEPTH) 20

72 OAH

UNITS ARE CONNECTED SIDE TO SIDE DURING INSTALLATION USING 4 - 1/4" BOLTS

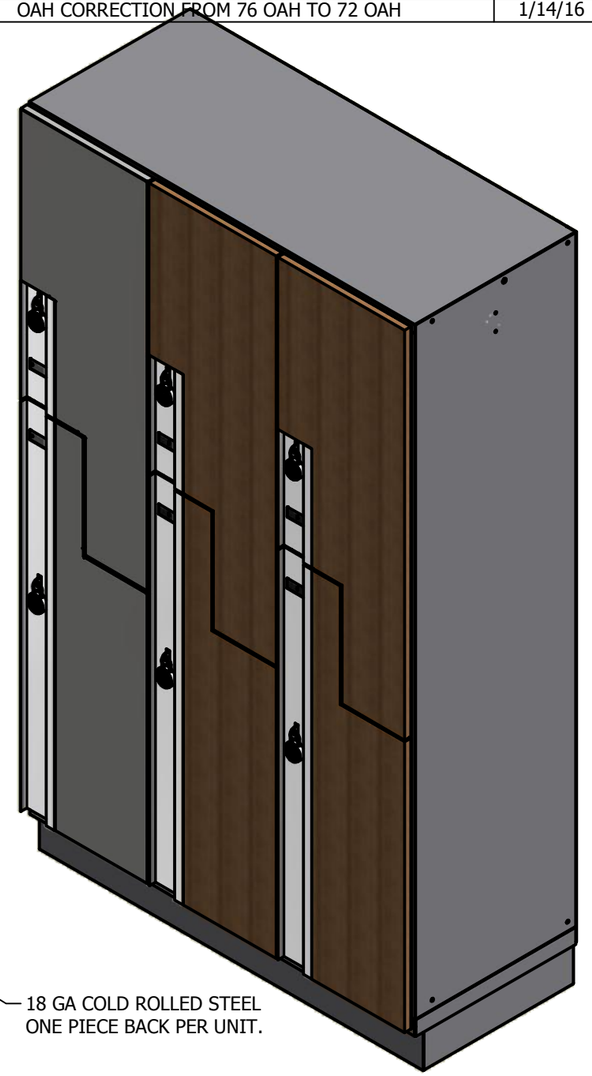

18 GA COLD ROLLED STEEL ONE PIECE BACK PER UNIT.

DRAWN kbelew 9/17/2015	DeBourgh Mfg. Co.
CHECKED	TITLE: ZEE LOCKER
QA	45 WIDE, 20 DEEP, 72 HIGH, 3 COLUMN, 2 TIER
MFG	DWG NO: 45W X 20D X 72H KELLOGG LOCKER V3 SPEC SHEET INSTALL DETAIL
APPROVED	SCALE / SIZE B / REV / SHEET 1 OF 4